


T499 Series - KEMET High Temperature (175°C) Tantalum Chip Capacitor

Features

- 175°C Maximum Temperature Capability
- Derating: 0.5 Vr at 175°C
- Self-healing mechanism
- Capacitance: 0.15 to 220µF
- Various termination options
- 100% Accelerated steady state aging
- 100% Surge current testing
- EIA standard case size
- Voltage 6 to 50V
- Pb-free/RoHS Compliant: Available

Outline Drawings

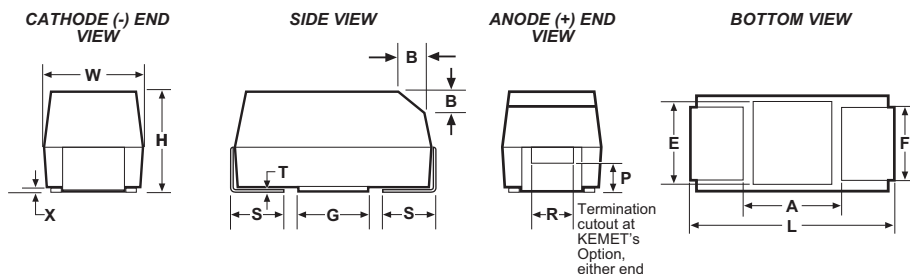

Dimensions - Millimeters (Inches)

Case Size		Component												
KEMET	EIA	L*	W*	H*	F* ±0.1 ± (.004)	S* ±0.3 ± (.012)	B (Ref) ± 0.15 ± (.004)	X (Ref)	P (Ref)	R (Ref)	T (Ref)	A (Min)	G (Ref)	E (Ref)
A	3216-18	3.2 ± 0.2 (.126 ± .008)	1.6 ± 0.2 (.063 ± .008)	1.6 ± 0.2 (.063 ± .008)	1.2 (.047)	0.8 (.031)	0.4 (.016)	0.10 ± 0.10 (.004 ± .004)	0.4 (.016)	0.4 (.016)	0.13 (.005)	1.4 (.055)	1.1 (.043)	1.3 (.051)
B	3528-21	3.5 ± 0.2 (.138 ± .008)	2.8 ± 0.2 (.110 ± .008)	1.9 ± 0.2 (.075 ± .008)	2.2 (.087)	0.8 (.031)	0.4 (.016)	0.10 ± 0.10 (.004 ± .004)	0.5 (.020)	1.0 (.039)	0.13 (.005)	1.1 (.043)	1.8 (.071)	2.2 (.087)
C	6032-28	6.0 ± 0.3 (.236 ± .012)	3.2 ± 0.3 (.126 ± .012)	2.5 ± 0.3 (.098 ± .012)	2.2 (.087)	1.3 (.051)	0.5 (.020)	0.10 ± 0.10 (.004 ± .004)	0.9 (.035)	1.0 (.039)	0.13 (.005)	3.1 (.122)	2.8 (.110)	2.4 (.094)
D	7343-31	7.3 ± 0.3 (.287 ± .012)	4.3 ± 0.3 (.169 ± .012)	2.8 ± 0.3 (.110 ± .012)	2.4 (.094)	1.3 (.051)	0.5 (.020)	0.10 ± 0.10 (.004 ± .004)	0.9 (.035)	1.0 (.039)	0.13 (.005)	3.8 (.150)	3.5 (.138)	3.5 (.138)
X	7343-43	7.3 ± 0.3 (.287 ± .012)	4.3 ± 0.3 (.169 ± .012)	4.0 ± 0.3 (.157 ± .012)	2.4 (.094)	1.3 (.051)	0.5 (.020)	0.10 ± 0.10 (.004 ± .004)	1.7 (.067)	1.0 (.039)	0.13 (.005)	3.8 (.150)	3.5 (.138)	3.5 (.138)

T499 Ordering Information

T **499** **X** **227** **M** **010** **A** **T** **E500**

Tantalum **Series** **Case Size** **Capacitance Picofarad Code** **Capacitance Tolerance** **Lead Material** **Failure Rate** **Voltage**

499 – High Temp (175°C)
 A,B,C,D,X
 First two digits represent significant figures.
 Third digit specifies number of zeros.
 M = ±20%
 K = ±10%

Note: in mOhm
 K designates "thousand"
 E1K5 = 1.5 Ohm
 E500 = 0.5 Ohm
 E15K = 15.0 Ohm

T = 100% Tin (Sn) Plated
 G = Gold

A = Not Applicable
 Note: 006 = 6.3

ESR

T499 Ratings & Part Number Reference

Capacitance μF	Case Size	KEMET Part Number	DC Leakage μA @ 25°C Max	DF % @ +25°C 120 Hz Max	ESR Ω @ +25°C 100 kHz Max
**6.3 Volt Rating at +85°C (3 Volt Rating at +175°C)					
2.2	A	T499A225(1)006A(2)E6K5	0.5	6	6.5
3.3	A	T499A335(1)006A(2)E8K0	0.5	6	8.0
4.7	A	T499A475(1)006A(2)E6K0	0.5	6	6.0
6.8	A	T499A685(1)006A(2)E6K0	0.5	6	6.0
6.8	B	T499B685(1)006A(2)E3K5	0.5	6	3.5
10.0	B	T499B106(1)006A(2)E3K5	0.6	6	3.5
15.0	B	T499B156(1)006A(2)E3K5	0.9	6	3.5
15.0	C	T499C156(1)006A(2)E1K8	0.9	6	1.8
22.0	B	T499B226(1)006A(2)E3K5	1.4	6	3.5
22.0	C	T499C226(1)006A(2)E1K8	1.4	6	1.8
33.0	B	T499B336(1)006A(2)E3K0	2.1	6	3.0
33.0	C	T499C336(1)006A(2)E1K8	2.0	6	1.8
47.0	C	T499C476(1)006A(2)E1K8	3.0	6	1.8
47.0	D	T499D476(1)006A(2)E800	2.9	6	0.8
68.0	C	T499C686(1)006A(2)E1K2	4.1	6	1.2
68.0	D	T499D686(1)006A(2)E800	4.1	6	0.8
100.0	D	T499D107(1)006A(2)E800	6.3	8	0.8
150.0	D	T499D157(1)006A(2)E700	9.0	8	0.7
10 Volt Rating at +85°C (5 Volt Rating at +175°C)					
1.5	A	T499A155(1)010A(2)E8K0	0.5	6	8.0
2.2	A	T499A225(1)010A(2)E8K0	0.5	6	8.0
3.3	A	T499A335(1)010A(2)E6K0	0.5	6	6.0
4.7	A	T499A475(1)010A(2)E6K0	0.5	6	6.0
4.7	B	T499B475(1)010A(2)E3K5	0.5	6	3.5
6.8	A	T499A685(1)010A(2)E6K0	0.7	6	6.0
6.8	B	T499B685(1)010A(2)E3K5	0.7	6	3.5
10.0	B	T499B106(1)010A(2)E3K5	1.0	6	3.5
10.0	C	T499C106(1)010A(2)E1K8	1.0	6	1.8
15.0	B	T499B156(1)010A(2)E3K5	1.5	6	3.5
15.0	C	T499C156(1)010A(2)E1K8	1.5	6	1.8
22.0	B	T499B226(1)010A(2)E3K0	2.2	6	3.0
22.0	C	T499C226(1)010A(2)E1K8	2.2	6	1.8
33.0	C	T499C336(1)010A(2)E1K8	3.3	6	1.8
33.0	D	T499D336(1)010A(2)E1K6	3.3	6	1.6
47.0	D	T499D476(1)010A(2)E800	4.7	6	0.8
68.0	D	T499D686(1)010A(2)E800	6.8	6	0.8
100.0	D	T499D107(1)010A(2)E700	10.0	8	0.7
220.0	X	T499X227(1)010A(2)E250	22.0	8	0.25
220.0	X	T499X227(1)010A(2)E500	22.0	8	0.5
16 Volt Rating at +85°C (8 Volt Rating at +175°C)					
1.0	A	T499A105(1)016A(2)E10K	0.5	4	10.0
1.5	A	T499A155(1)016A(2)E8K0	0.5	6	8.0
2.2	A	T499A225(1)016A(2)E6K0	0.5	6	6.0
3.3	A	T499A335(1)016A(2)E6K0	0.5	6	6.0
3.3	B	T499B335(1)016A(2)E3K5	0.8	6	3.5
4.7	B	T499B475(1)016A(2)E6K0	0.8	6	6.0
6.8	A	T499A685(1)016A(2)E7K0	1.1	6	7.0
6.8	B	T499B685(1)016A(2)E3K5	1.1	6	3.5
6.8	C	T499C685(1)016A(2)E1K8	1.6	6	1.8
10.0	B	T499B106(1)016A(2)E3K5	1.6	6	3.5
10.0	C	T499C106(1)016A(2)E1K8	1.6	6	1.8
15.0	C	T499C156(1)016A(2)E1K8	2.4	6	1.8
22.0	C	T499C226(1)016A(2)E1K6	3.6	6	1.6
22.0	D	T499D226(1)016A(2)E800	3.5	6	0.8
33.0	D	T499D336(1)016A(2)E800	5.3	6	0.8
47.0	D	T499D476(1)016A(2)E800	7.5	6	0.8

(1) To complete KEMET part number, insert K - ± 10% or M - ±20% capacitance tolerance.

(2) To complete KEMET part number, insert Lead Material T = 100% Tin; G = Gold.

** 6 volt product equivalent to 6.3 volt product.


T499 Ratings & Part Number Reference

Capacitance μF	Case Size	KEMET Part Number	DC Leakage μA @ 25°C Max	DF % @ +25°C 120 Hz Max	ESR Ω @ +25°C 100 kHz Max
20 Volt Rating at +85°C (10 Volt Rating at +175°C)					
0.68	A	T499A684(1)020A(2)E12K	0.5	4	12.0
1.0	A	T499A105(1)020A(2)E10K	0.5	4	10.0
1.5	A	T499A155(1)020A(2)E8K0	0.5	6	8.0
2.2	B	T499B225(1)020A(2)E3K5	0.5	6	3.5
3.3	B	T499B335(1)020A(2)E3K5	0.5	6	3.5
4.7	B	T499B475(1)020A(2)E3K5	0.5	6	3.5
4.7	C	T499C475(1)020A(2)E2K4	0.9	6	2.4
6.8	C	T499C685(1)020A(2)E1K9	1.4	6	1.9
10.0	C	T499C106(1)020A(2)E1K8	2.0	6	1.8
15.0	C	T499C156(1)020A(2)E1K7	3.0	6	1.7
15.0	D	T499D156(1)020A(2)E1K0	3.0	6	1.0
22.0	D	T499D226(1)020A(2)E800	4.4	6	0.8
25 Volt Rating at +85°C (12.5 Volt Rating at +175°C)					
0.47	A	T499A474(1)025A(2)E14K	0.5	4	14.0
0.68	A	T499A684(1)025A(2)E10K	0.5	4	10.0
1.0	A	T499A105(1)025A(2)E8K0	0.5	4	8.0
1.5	B	T499B155(1)025A(2)E5K0	0.5	6	5.0
2.2	B	T499B225(1)025A(2)E4K5	0.6	6	4.5
3.3	C	T499C335(1)025A(2)E2K5	0.8	6	2.5
4.7	C	T499C475(1)025A(2)E2K4	1.2	6	2.4
6.8	C	T499C685(1)025A(2)E1K9	1.7	6	1.9
6.8	D	T499D685(1)025A(2)E1K1	1.7	6	1.1
10.0	C	T499C106(1)025A(2)E1K5	2.0	6	1.5
10.0	D	T499D106(1)025A(2)E1K0	2.5	6	1.0
15.0	D	T499D156(1)025A(2)E1K0	3.8	6	1.0
22.0	D	T499D226(1)025A(2)E800	5.5	6	0.8
33.0	D	T499D336(1)025A(2)E700	8.3	6	0.7
35 Volt Rating at +85°C (17.5 Volt Rating at +175°C)					
0.15	A	T499A154(1)035A(2)E19K	0.5	4	19.0
0.22	A	T499A224(1)035A(2)E18K	0.5	4	18.0
0.33	A	T499A334(1)035A(2)E15K	0.5	4	15.0
0.47	B	T499B474(1)035A(2)E8K0	0.5	4	8.0
0.68	B	T499B684(1)035A(2)E6K5	0.5	4	6.5
1.0	A	T499A105(1)035A(2)E10K	0.5	4	10.0
1.0	B	T499B105(1)035A(2)E5K0	0.5	4	5.0
1.5	C	T499C155(1)035A(2)E4K5	0.5	6	4.5
2.2	C	T499C225(1)035A(2)E3K5	0.5	6	3.5
3.3	C	T499C335(1)035A(2)E2K5	1.2	6	2.5
4.7	C	T499C475(1)035A(2)E2K5	1.3	6	2.5
4.7	D	T499D475(1)035A(2)E1K5	1.0	6	1.5
6.8	D	T499D685(1)035A(2)E1K3	2.4	6	1.3
10.0	D	T499D106(1)035A(2)E1K0	3.5	6	1.0
22.0	X	T499X226(1)035A(2)E700	7.7	6	0.7
33.0	X	T499X336(1)035A(2)E600	11.6	6	0.6
50 Volt Rating at +85°C (25 Volt Rating at +175°C)					
3.3	D	T499D335(1)050A(2)E2K0	1.7	6	2.0
10.0	D	T499D106(1)050A(2)E1K0	5.0	6	1.0

- (1) To complete KEMET part number, insert K - ± 10% or M - ± 20% capacitance tolerance.
- (2) To complete KEMET part number, insert Lead Material T = 100% Tin; G = Gold
- ** 6 volt product equivalent to 6.3 volt product.

Land Pattern Dimensions for Reflow Solder

KEMET/ EIA Size Code	Pad Dimensions				
	Z	G	X	Y (Ref)	C (Ref)
A/3216-18	4.70	0.80	1.50	1.95	2.75
B/3528-21	5.00	1.10	2.50	1.95	3.05
C/6032-28	7.60	2.50	2.50	2.55	5.05
D/7343-31	8.90	3.80	2.70	2.55	6.35
X/7343-43	8.90	3.80	4.40	2.55	6.35

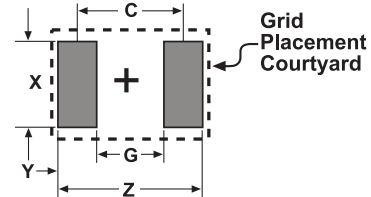

Packaging Specifications

Case Codes		Tape & Reel Dimensions				
KEMET	EIA	Tape Width (mm)	Pitch mm ± 0.1		Reel Quantity	
			Part	Sprocket	180mm (7")	330mm (13")
A	3216-18	8 ± 0.3	8	4	2000	9000
B	3528-21	8 ± 0.3	8	4	2000	8000
C	6032-28	12 ± 0.3	8	4	500	3000
D	7343-31	12 ± 0.3	8	4	500	2500
X	7343-43	12 ± 0.3	8	4	500	2000

Component Marking

